


Lashing straps (set)

- lashing straps with standard lengths: 6, 8, 10, 12 m
- the set consists of belt LC 2000 or 2500 daN and ratchet with parameters SHF=50 daN, STF 300-400 daN
- single gear on ratchet
- set ended with two J-hooks
- lashing straps conforming the EN-12195-2 standard
- possibility to purchase belt and tensioner separately
- possibility to execute advertising print for the customer (company name, logotype).



"ERGO" lashing straps (set)

- lashing straps with standard lengths: 6, 8, 10, 12 m
- the set consists of belt LC 2500 daN and tensioning devices with parameters SHF=50 daN, STF 500 daN
- double gear on ratchet
- elongated arm of the tensioner facilitating Lashing strap tensioning
- set ended with two J-hooks
- lashing straps conforming the EN-12195-2 standard
- possibility of purchase belt and tensioner separately
- possibility to execute advertising print for the customer (company name, logotype).

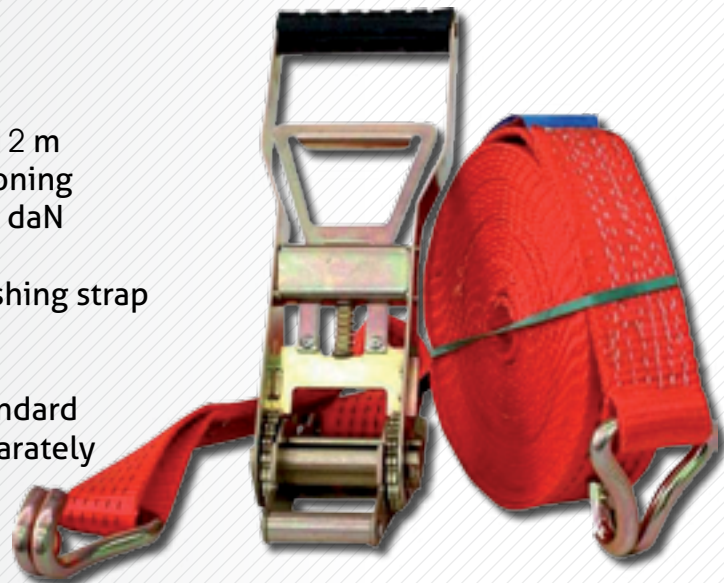

Lashing straps intended for light transport and oversized loads

- We offer wide range of lashing straps used in the transport using vehicles and beavertail trucks up to 3.5-tonne GVW and in transport of oversized loads.

Corner protectors for lashing straps

- made of material with various hardness and flexibility
- available in different colours and sizes - depending on width of the lashing straps.



Chain, endless, textile slings

- certified, conforming the EN 1492 standard
- resistant to oils, greases, moisture
- different lengths and allowable working load available.

Load lashing chains

- used for transport of oversized loads
- according to the EN-12195-3 standard
- single-part systems with ratchet and additional shortening hook
- different lengths and strength classes available
- very easy for assembly and storage.



Practical guidelines for use of anti-slip mats

- loading space should be cleaned to the best possible degree
- it is recommended to use mat directly under each loading unit
- convenient and quick for use - possibility to cut straps of any size
- the same mat can be used many times (applies to 8 mm thickness)
- the best effect is achieved using mat with lashing straps.

Available sizes

(length x width x thickness in mm):

5000	x	250	x	8
5000	x	250	x	6
10000	x	250	x	3
10000	x	1250	x	8
15000	x	1250	x	6
20000	x	1250	x	3



**IN OUR OFFER WE HAVE ONLY MATS
WITH GERMAN CERTIFICATE**

REMEMBER!

**Mats with high friction
coefficient protect
your valuable load!**



Cargo plank

- cargo plank is used for horizontal restraint of load and separating of loading space
- beams made of aluminium, ended with steel locks
- adjustable range of lengths 2400 – 2700 mm
- weight: +/-10 kg.



Cargo bar

- bars used in vertical protection and loads restraint in containers and refrigerated trucks
- made of steel galvanized pipe
- available in squared and circular profile
- on both sides ended with anti-slip rubber cover
- possibility of length adjustment
- standard dimensions: 1880 – 2850 mm and 2565 – 2935 mm.

